


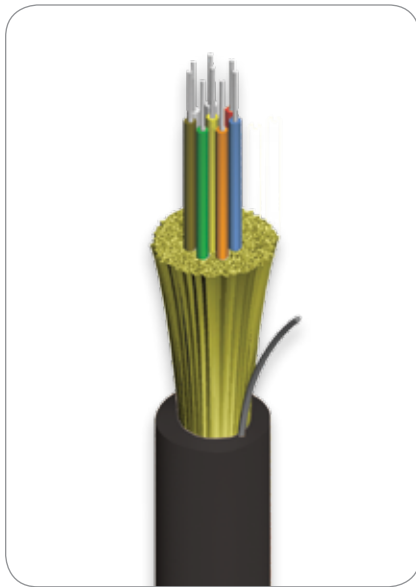

Indoor/Outdoor Riser Tight Buffered Cable


Indoor/Outdoor Tight Buffered cables are specified for campus network cabling between buildings where interbuilding lengths are short enough that the installer can recognize savings from the lower costs of terminating tight buffered cables.

For indoor applications the cable is OFNR listed. For outdoor applications the cable is manufactured with an outer jacket that incorporates a UV stabilizer for protection against exposure to the sun plus an anti-fungus protection for use in underground applications.

Features

- Cables are water blocked and meet water penetration requirements of GR-20-CORE (this helps ensure that any damage to cable is restricted to a repairable length of several meters)
- Outer jacket is moisture-resistant, fungus-resistant and UV resistant for outdoor use
- With a Riser rating, this cable can be used in all environments: Riser, general inside plant and outside plant
- Tested to meet or exceed EIA/TIA 568-A / GR-409-CORE and ICEA-S-104-696
- MSHA approved for mining applications
- Compliant to Directive 2002/95/EC (RoHS)

Cable Components

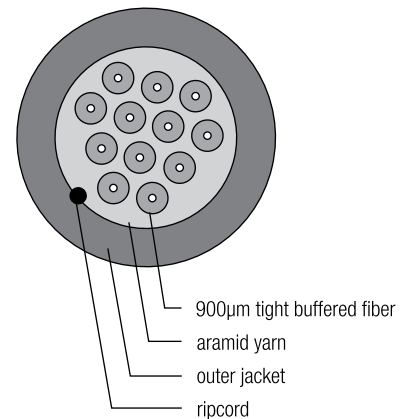

Mechanical Data

CABLE TYPE	AFL NO.	FIBER COUNT	NOMINAL DIAMETER	WEIGHT	TENSION		BENDING RADIUS	
	RISER		INCHES (MM)	LBS/1000FT (KG/ KM)	LBS (N)		INCHES (CM)	
					INSTALLA- TION	LONG TERM	INSTALLA- TION	LONG TERM
Indoor/Outdoor Tight Buffered Cable	KR002★481001	2	0.19 (4.8)	14 (21)	150 (660)	45 (198)	2.8 (7.2)	1.9 (4.8)
	KR004★481001	4	0.19 (4.8)	15 (23)	150 (660)	45 (198)	2.8 (7.2)	1.9 (4.8)
	KR006★531001	6	0.21 (5.3)	19 (28)	150 (660)	45 (198)	3.1 (8.0)	2.1 (5.3)
	KR008★561001	8	0.22 (5.6)	23 (33)	150 (660)	45 (198)	3.3 (8.4)	2.2 (5.6)
	KR012★651001	12	0.26 (6.5)	26 (38)	150 (660)	45 (198)	3.5 (9.0)	2.6 (6.5)
	KR018★801001	18	0.31 (8.0)	40 (59)	300 (1320)	90 (396)	4.7 (12.0)	3.1 (8.0)
	KR024★871001	24	0.33 (8.7)	46 (69)	300 (1320)	90 (396)	5.2 (13.1)	3.4 (8.7)

★ Please specify fiber type when ordering (see below)

5 = 50/125 µm multimode GIGA-Link™ 600
 7 = 50/125 µm multimode GIGA-Link™ 2000
 6 = 62.5/125 µm multimode GIGA-Link™ 300
 8 = 62.5/125 µm multimode GIGA-Link™ 1000
 9 = 9/125 µm single-mode
 L = 50/125 µm multimode Laser-Link 300 for 10 Gigabit Ethernet
 K = Single-mode Futureguide SR-15e Bend Insensitive

Contact Customer Service for special fiber types/performance needs.
 Standard jacket color is black. Other colors available by request.

Temperature Specifications

TEMPERATURE RANGE		
OPERATING	INSTALLATION	STORAGE
-40°C to +75°C	-20°C to +75°C	-40°C to +75°C



Indoor/Outdoor Riser Tight Buffered Cable

Specifications

CORE SIZE/ FIBER TYPE	ISO/ IEC	MAXIMUM ATTENUATION (DB/ KM)			OVERFILL LAUNCH MIN. BANDWIDTH (MHZ•KM)		EMB _c (MHZ•KM)	GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)		10 GIGABIT ETHERNET MIN.LINK DISTANCE (METERS)	
		850 NM	1300 NM	1550 NM	850 NM	1300 NM		850 NM	1300 NM	850 NM	1300 NM
(6) 62.5 Giga-Link™ 300	OM1	3.5	1.2	N/A	200	600	N/A	300	550	32	—
(8) 62.5 Giga-Link™ 1000	OM1	3.5	1.2	N/A	350	600	N/A	500	1000	65	—
(5) 50 Giga-Link™ 600	OM2	3.5	1.5	N/A	500	500	N/A	600	600	82	—
(7) 50 Giga-Link™ 2000	OM2	3.5	1.2	N/A	500	800	N/A	750	2000	110	—
(A) 50 Laser-Link 150	OM2	3.0	1.2	N/A	700	500	950	800	550	150	—
(L) 50 Laser-Link 300	OM3	3.0	1.2	N/A	1500	500	2000	1000	550	300	—
(C) 50 Laser-Link 550	OM4	3.0	1.2	N/A	3500	550	4700	1040	550	550	—
(K) SM Futureguide SR-15e Bend Insensitive (ITU G.657.A)	OS2	N/A	0.5	0.5	N/A	N/A	N/A	N/A	5000	N/A	10,000
(9) SM	OS2	N/A	0.5	0.5	N/A	N/A	N/A	N/A	5,000	N/A	10,000
(1) 100/140 Multimode		5.5	3.5	N/A	100	100	N/A	N/A	N/A	N/A	N/A

Tested to meet or exceed EIA/TIA 568-B3 / Telcordia GR-409-CORE

Maximum Cable Length - Reel Size

ITEM	FIBER BOX*	REEL A	REEL B	REEL C	REEL D	REEL E
Reel/Box Height (inches)	15.13	16	24	30	34	34
Reel/Box Outside Width (inches)	13.0	15	17	15.25	21.25	20
Drum Diameter (inches)	8.0	8	12	12	12	24
Reel Weight (lbs)	6.0	10	23	34	44	48
CAPACITY: METERS (FEET)						
2 Fiber	305 (1,000)	1,000 (3,281)	3,200 (10,500)	5,000 (16,404)	—	—
4 Fiber	305 (1,000)	1,000 (3,281)	3,200 (10,500)	5,000 (16,404)	—	—
6 Fiber	305 (1,000)	—	2,000 (6,561)	3,400 (11,154)	5,000 (16,404)	—
8 Fiber	—	—	1,700 (5,577)	4,000 (9,514)	5,000 (16,404)	—
12 Fiber	—	—	1,250 (4,100)	2,100 (6,890)	—	—
18 Fiber	—	—	—	—	—	1,500 (4,921)
24 Fiber	—	—	—	—	—	1,500 (4,921)

* Add suffix "—XMFBOX" to cable part number to specify "Fiber-In-A-Box" solution. "X" indicates length of cable in thousands of feet. Only available in standard lengths as indicated in chart above.

EXAMPLE: KR0029481001—3MFBOX

Would be the resulting part number for 3,000 feet of KR002*481001 cable with 9/125 µm single-mode fiber and the Fiber-In-A-Box solution. Refer to Fiber-In-A-Box data at front of catalog.