


Specifications & Technical Data



Part Number: 1258

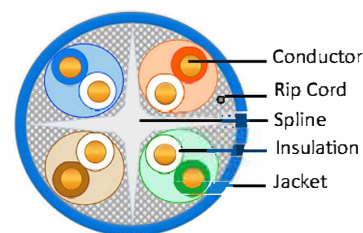

SySPEED® Premium Cat 6E Network Ethernet Cable

Unshielded Twisted Pair (UTP) 4 Pair 23 AWG

Riser Rated - CMR, FT4, Sunlight Resistant

Characteristics

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> * Conductor: 23 AWG Solid Bare Annealed Copper * Insulation: Premium Polyolefin * Spline: Premium Polyolefin * Rip Cord: Applied Longitudinally Under Jacket * Jacket: Premium PVC (Flame-Retardant, Sun Resistant & RoHS Compliant) | <ul style="list-style-type: none"> * Nominal Cable Diameter (in): 0.240 * Temperature Rating (°F):
Installation: +32 to +140
Storage & Operation: -4 to +167 * Operating Voltage: 300V Max | Conductor Color Code
Pair 1: Blue - White/Blue
Pair 2: Orange - White/Orange
Pair 3: Green - White/Green
Pair 4: Brown - White/Brown |
|---|--|---|

Features & Benefits

- * Cable is flexible and easy to install
- * Cable coiled with REELEX® Technology to ensure tangle-free pull
- * For applications that require Optimum Cat 6 Performance with flexibility for the future
- * Third-party verified for guaranteed performance and RoHS compliance
- * Free from restricted metals and hazardous compounds. Check our green leaf label for more information
- * Combines indoor/outdoor applications into one product. Complies with UL 1581 sunlight resistance requirement for outdoor installations *(Do not use as a substitute for Underground Direct Burial Cables)*

[Click below "All-in-One" logo to see more info](#)



Applications

Premise Horizontal Cable, Gigabit Ethernet, IEEE 802.3:1000 BASE-T Gigabit Ethernet, 100 BASE-TX, 10 BASE-T, 155 Mb/s and 622 Mb/s ATM, ANSI X3.263: 100 Mb/s, Broadband Baseband Analog Video and transport of High Definition 1920 X 1080p Ultra-High Definition 4K/2k signals when used in conjunction with an HDMI or HD BASE-T extender between a source and display, RS-422 IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Standard Compliances

- | | |
|---|--|
| <ul style="list-style-type: none"> * ANSI/TIA 568D.2 * ANSI/TIA 862 (Building Automation) * ISO/IEC 11801 Ed. 2.0 (Class D) * ICEA S-102-700 (Category 6) * NEC / CEC Type CMR (UL 1666) for Riser * RoHS 3 (EU 2015/863) | <ul style="list-style-type: none"> * UL 444 * ASTM B-3 |
|---|--|

Certifications



ISO 9001: 2015, ISO 14001: 2015, OHSAS 18001

Electrical Characteristics

Max Capacitance (nF/100m @ 1 kHz)	Max DC Resistance (Ω/100m @ 68 °F)	Max Delay Skew (ns/100m)	Nom Velocity of Propagation (%)	Characteristic Impedance (Ω@ 1- 100 MHZ)
5.6	9.38	45	69	100±15
Frequency (MHz)	Insertion Loss Maximum (dB/100m)	NEXT Minimum (dB/100m)	PSNEXT Minimum (dB/100m)	Return Loss Minimum (dB/100m)
1	2.0	74.3	72.3	20.0
4	3.8	65.3	63.3	23.0
8	5.3	60.8	58.8	24.5
10	6.0	59.3	57.3	25.0
16	7.6	56.2	54.2	25.0
20	8.5	54.8	52.8	25.0
25	9.5	53.3	51.3	24.3
31.25	10.7	51.9	49.9	23.6
62.5	15.4	47.4	45.4	21.5
100	19.8	44.3	42.3	20.1
155	25.2	41.4	39.4	18.8
200	29.0	39.8	37.8	18.0
250	32.8	38.3	36.3	17.3
300	36.4	37.1	35.1	16.8
350	39.8	36.1	34.1	16.3
400	43.0	35.3	33.3	15.9
500	48.9	33.8	31.8	15.2
550	51.8	33.2	31.2	14.9
600	54.5	32.6	30.6	14.7

* Spec meets ANSI/TIA 568D.2 standard. Frequencies beyond the TIA requirements are for information only. All Values are dB/100m (328ft)

Revision #3 Revision Date: 03-23-20 © Syston Cable Technology. All Rights reserved.

Please note: Although Syston Cable makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice.